

海鳥牌安全帽

鏡片拆裝操作說明書

適用型號:PN-3800/5000/5500

MO-01/CM-06




(A) To Remove the shield

- 1.Lift shield all the way up .
- 2.Pull down on spring loaded plate .
- 3.Pull shield up and away from Helmet to release .
- 4.Release spring loaded plate .

(B) To reinstall the shield the helmet should rest firmly in your lap facing you.



Step 1 Insert the rear , pivot tab into the bottom of the slot. Both sides must be inserted. The shield will be in an open position , slightly farther open than when in normal use .

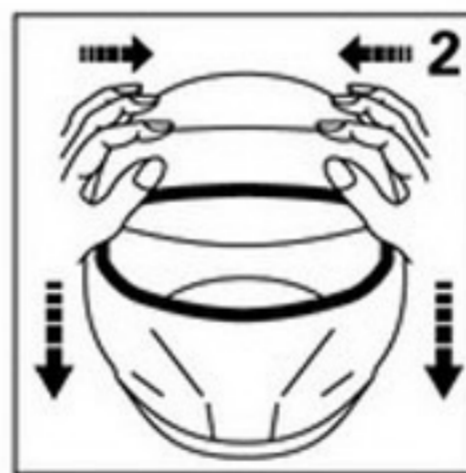

Step 2 Place your palms on the pivot point gently squeezing the ratchet tabs inward against the helmet . Rotate the shield into a closed position making sure to keep the rear tabs in position . The spring loaded shield retention keepers will automatically allow the front tabs to rotate into place .

A. 1.請將鏡片上推至最頂端. 2.將固定鏡片插梢下拉.

B. 1.請將鏡片往帽後方向推起.鏡片即可脫離.

B. 2安裝鏡片時鏡片後上方凸緣處插入齒輪座凹槽內.

再將鏡片前方凸出固定勾推入齒輪座滑槽內即安裝完成.

注意:如鏡片前方凸出固定勾損壞或未正確裝入滑槽內.

使用中的鏡片有可能會彈出.安裝後建議先檢查動作是否有正常